

DUX WATER HEATERS

HOT WATER SOLUTIONS PRODUCT GUIDE



AN ICONIC BRAND

An iconic Australian brand since 1915, Dux is committed to producing high quality water heaters and to the on-going development of new products for the Australian market.

Dux water heaters are manufactured in a state-of-the-art facility in regional NSW, using a Quality Endorsed Company production system. This ensures that customers have purchased the highest quality water heater available.

Dux is proudly owned by Noritz, an international hot water powerhouse and a leading Japanese manufacturer of residential and commercial water heaters.



Moss Vale, NSW



Akashi, Japan



proflo[®] for homes of all sizes

TOUGH BUT STYLISH HOT WATER SYSTEMS THAT WILL GO THE DISTANCE.

If you're looking to replace an existing electric storage water heater, Proflo is an ideal solution - available in a variety of tank sizes for homes of all sizes and delivering full mains pressure.

PROFLO 25L & 50L

- Proflo 50L now boasts a compact 670mm height, making it an easier fit into tight cupboards
- V-Fit plumbing connections provide better access for easier installation
- Available as hardwired or plug-in models
- Made in a Noritz manufacturing facility
- 7 years tank warranty, 1 year parts and labour*

PROFLO 80L - 400L

- 80L - 400L Proflo water heaters now boast a larger anode to increase tank life
- Features durable Y class commercial grade enamel
- Hard-wearing, tough polymer base resists damage and is rust-proof
- Feature 50mm thick, dense foam insulation for less heat loss and lower running costs
- Twin element models available
- Made in Australia
- 10 years tank warranty, 1 year parts and labour*

RANGE FEATURES

- Water connections on both sides of the tank
- Screwless tank lids offer a cleaner appearance and are safer too
- Low maintenance and long service life
- Full flow pressure to all outlets
- Can be installed indoors or out#

| CAPACITY | NO. OF ADULTS & CHILDREN | |
|----------|--------------------------|----------|
| | Continuous Tariff | Off Peak |
| 25L | 1 | |
| 50L | 2 | |
| 80L | 3 | |
| 125L | 4 | |
| 160L | 4 | 3 |
| 250L | 6 | 4 |
| 315L | 7 | 5 |
| 400L | 8 | 6 |

Adult icon can represent dishwasher or washing machine.
 Continuous Tariff; Provides power so that your water can be heated at any time of the day or night.
 Off Peak; Generally only provides power to your water heater for between 6-12 hours a night - check with your local electricity retailer for details of off-peak hours.
 #Plug in models can only be installed indoors.



SO MANY SIZES FOR HOT WATER YOU CAN'T GO WRONG.

prodigy[®] 4 & 5 star gas storage

NO EXTRA SPACE NEEDED TO INSTALL AN EFFICIENT PRODUCT.

Gas storage hot water systems give you full mains pressure with a constant, strong stream of hot water.

If you're looking to replace an existing gas storage water heater, Dux Prodigy is an ideal solution. The range consists of both 4 and 5 star models that feature identical dimensions to older 3 star units, allowing easy replacement with higher efficiency models.

PRODIGY 4 STAR

- Market leading in hot water recovery and first hour capacity†
- 7 years tank warranty, 1 year parts and labour*

PRODIGY 5 STAR

- The Prodigy 5 135L is the most efficient gas storage water heater in the Australian market
- Up to 5.4 star energy efficiency#
- Improved patented flue damper design reduces heat loss
- 10 years tank warranty, 5 years parts and labour on flue damper, 1 year other parts and labour*

RANGE FEATURES

- Powerful burner technology means faster recovery rates and more hot water when you need it
- Dual anodes to further increase tank life
- Features durable Y class commercial grade enamel
- Identical footprint with older 3 star gas storage water heaters
- Mains pressure hot water
- Inline foam filling process provides superior insulation and a more robust design
- No power point required so hot water continues, even when there is no power
- Operates on a standard size 1/2" gas line
- Available in both natural gas and propane models
- Made in Australia

| FIRST HOUR CAPACITY | STORAGE CAPACITY | RECOVERY RATE (L/hr)* | FIRST HOUR CAPACITY |
|---------------------|------------------|-----------------------|---------------------|
| Prodigy 4 | 135L | 126L | 261L |
| Prodigy 4 | 170L | 146L | 316L |
| Prodigy 5 | 135L | 126L | 261L |
| Prodigy 5 | 170L | 141L | 311L |

| | CAPACITY (L) | PEOPLE |
|----------------|--------------|--------|
| prodigy | 135 | 3-6 |
| prodigy | 170 | 4-7 |

Adult icon can represent dishwasher or washing machine.

NEW AND IMPROVED TECHNOLOGY MAKES THE DIFFERENCE

† In the 4 star gas storage class.

*Recovery rate for Prodigy natural gas models only.

#Prodigy 5 135L is rated at 5.4 stars energy efficiency, Prodigy 5 170L is rated at 5.2 stars energy efficiency.



PRODIGY 4 STAR



135L

170L

PRODIGY 5 STAR



135L

170L

Both Prodigy 4 and 5 star gas storage models feature the same footprint as existing 3 star gas storage water heaters, allowing easy replacement of older systems.



500

420

gas continuous flow

HOT WATER THAT NEVER RUNS OUT.

Never run out of hot water again with a Dux Always Hot continuous flow. They are compact in size, highly energy efficient and are backed by a 12 year heat exchanger warranty.

Available in four different capacities and even the option of dual heat exchanger models[^] for greater running cost savings. There's a model to suit every family.

NON-CONDENSING MODELS

- Available in 17L, 21L, 26L and 32L/min models
- Up to 6.1 star energy rating[†]
- Single copper heat exchanger for efficient heating

CONDENSING MODELS

- Available in 21L and 26L/min models
- Up to 6.7 star energy rating[†]
- Dual heat exchanger design that boasts over 90% thermal efficiency by capturing additional heat

RANGE FEATURES

- Never runs out of hot water
- Superior technology straight from Noritz, a leading manufacturer of continuous flow water heaters
- Electronic ignition means no standby pilot light
- Natural gas and LPG models
- 12 year warranty on heat exchanger, including 3 year full parts and labour*



Dux Always Hot provides the choice between high performance (non-condensing) and ultra-high performance (condensing) continuous flow models.

| SIZING | MODELS | | | |
|----------------|--------|-----|-----|-----|
| | 17L | 21L | 26L | 32L |
| No. of Outlets | 2 | 2-3 | 3 | 4 |

ACCESSORIES



Accessories include separate controllers that allow you to select the hot water temperature you prefer – a welcome safety and convenience feature for families.

Optional accessories include:

- Pipe covers
- Recess boxes
- Anti-theft kit
- Flue diverters


See Accessories Specification brochure on www.dux.com.au for part numbers.

HOT WATER ON DEMAND WHEN YOU NEED IT

NON-CONDENSING

Water passes through a single copper heat exchanger and the energy from the exhaust gas vents to the atmosphere.

EXHAUST TEMPERATURE IS APPROX 200°C

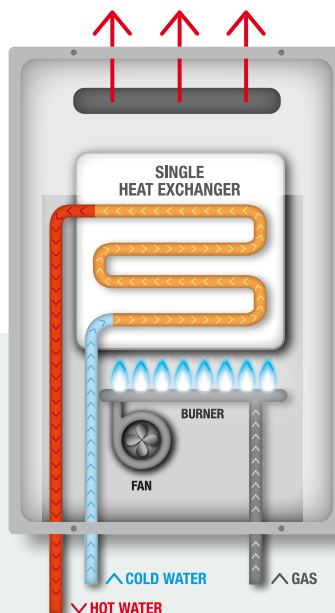


(Conventional technology)
Thermal efficiency = 80~84%

CONDENSING

Water is heated in the primary heat exchanger, and again in a secondary heat exchanger using waste heat from the exhaust gas. This reduces energy use and lowers the exhaust gas temperature.

EXHAUST TEMPERATURE IS ONLY 50°C

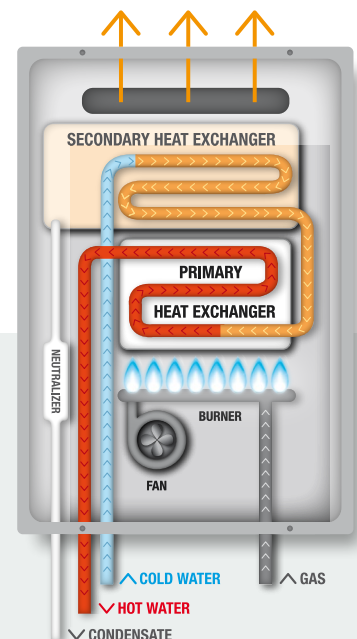

(Condensing technology)
Thermal efficiency = 90~96%

[†]21ECB & 26ECB models are rated 6.7 stars. 21ENB models are rated 6.1 stars. 17ENB & 26ENA models are rated 6.0 stars. 32END models are rated 5.8 stars.

[^]21ECB & 26ECB are condensing models featuring dual heat exchangers.

airoheat® *air-sourced heat pump*

POWERFUL, EFFICIENT AND KINDER TO THE ENVIRONMENT.

If your home doesn't offer suitable roof space and orientation for installing solar collectors, Airoheat is the next best choice in environmentally friendly water heaters, without the need for solar panels.

Working like a refrigerator but in reverse, it takes air in from outside the tank and uses it to heat water. Its patented in-tank heating coil is fully immersed in water, ensuring direct heat transfer. This eliminates exposure to heat loss issues often associated with other styles of heat pumps.


- High efficiency design for lower running costs
- Single piece, integrated design allows for faster installation
- Dual anodes provide greater protection against tank corrosion
- Powerful compressor for greater heating capacity
- Patented in-tank, dual wall heating coil to improve heat transfer
- Improved thermal efficiency minimises heat loss due to a fully insulated storage tank
- Water connections on both sides of tank provide easy installation
- Composite condensation tray is designed for rapid drainage in high rainfall areas
- Eligible for Small-scale technology certificates
- 5-year tank warranty, 2-year refrigerant components, 1-year full parts and labour*



| airoheat® heatpump | | |
|--------------------|--------|-----|
| CAPACITY (L) | PEOPLE | |
| 250 | | 3-5 |

Adult icon can represent dishwasher or washing machine.

| PRODUCT CODE: D2FHG4HW0C | STC ZONE* | | | | |
|-----------------------------|-----------|----|----|----|-----|
| | 1 | 2 | 3 | 4 | 5† |
| 250L HEAT PUMP | 22 | 21 | 26 | 27 | 27† |



†Refer to www.dux.com.au/zones for postcodes in Zone 5.

STC values are subject to change without notice and are correct at time of printing. STCs calculations are based on continuous tariff. Size figures are based on environmental averages which can effect the performance of solar and heat pump heaters. Adult icon can represent dishwasher or washing machine. Based on connection to continuous tariff.

AUSTRALIA'S MOST HIGHLY AWARDED ENVIRONMENTAL WATER HEATER

ecosmart® *free energy from the sun*

OUTSTANDING EFFICIENCY TO HELP REDUCE ENERGY BILLS.

If you're aiming to reduce your carbon footprint, choose an Ecosmart solar water heater. Ecosmart solar uses the sun's energy to heat water via roof mounted solar collectors. Available in a choice of electric or gas boosted models, ensuring hot water on cloudy days or in times of high demand.

Ecosmart solar will save you money on energy bills, providing an economical, sustainable hot water solution for years to come.

- Split system design provides flexible installation locations without the need for expensive roof reinforcement
- Available in electric or gas boosted models
- Multi-temperature sensors on a vitreous enamel tank configuration enable optimum solar gain while reducing the risk of overheating
- High performance solar collectors ensure efficient transfer of heat to water
- European manufactured circulating pump and smart system controller
- Efficient, polyurethane insulated storage tank
- Features durable Y class commercial grade enamel and a larger anode to increase tank life
- Supplies mains pressure hot water
- Eligible for Small-scale technology certificates (STCs)
- 7-year tank, 5 year collector warranty, 1-year parts and labour*



ELECTRIC BOOSTED



GAS BOOSTED

MAKES SENSE... SAVES \$\$\$\$

You can trade your STCs to earn a discount of approx \$1,300* off the cost of your new solar water heater.

Dux Ecosmart solar water heaters boast one of the highest number of STCs, meaning you'll save more with Dux.

STC ZONES



| CAPACITY | ELECTRIC BOOST | GAS BOOST |
|----------|----------------|-----------|
| 250L | 3-4 | 2-5 |
| 315L | 3-5 | 2-6 |
| 400L | 4-7 | 4-8 |

Adult icon can represent dishwasher or washing machine.

| electric boosted solar | | | STC ZONE* | | | |
|-------------------------------|------------|---|-----------|----|----|----|
| | COLLECTORS | | 1 | 2 | 3 | 4 |
| 250L | D2M36F202 | 2 | 39 | 43 | 38 | 34 |
| 315L | D3M36F202 | 2 | 40 | 43 | 39 | 34 |
| 315L | D3M36F203 | 3 | 44 | 46 | 46 | 41 |
| 400L | D4M36F202 | 2 | 39 | 43 | 38 | 34 |
| 400L | D4M36F203 | 3 | 44 | 46 | 46 | 41 |

| gas boosted solar | | | STC ZONE* | | | |
|--------------------------|------------|---|-----------|----|----|----|
| | COLLECTORS | | 1 | 2 | 3 | 4 |
| 250L | D2F20226N | 2 | 38 | 42 | 38 | 33 |
| 315L | D3F20226N | 2 | 38 | 42 | 38 | 33 |
| 315L | D3F20326N | 3 | 44 | 45 | 46 | 41 |
| 400L | D4F20226N | 2 | 38 | 42 | 38 | 33 |
| 400L | D4F20326N | 3 | 44 | 45 | 46 | 41 |

Systems eligibility for STCs and STC values are subject to change without notice and are correct at time of printing. STCs calculations are based on continuous tariff. Size figures are based on environmental averages which can effect the performance of solar and heat pump heaters. Adult icon can represent dishwasher or washing machine. Based on connection to continuous tariff. ^Calculation references STC eligibility in zone 3 (38) and STC valuation of \$35 per STC

INVIGORATING HOT WATER IN ANY KIND OF WEATHER

PROFLO® ELECTRIC STORAGE


proflo small electric

| SPECIFICATIONS | 25S124P [^] | 25S1 | 50S124P [^] | 50S1 |
|-----------------------------|----------------------|----------|----------------------|----------|
| Storage Capacity (L) | 31 | 31 | 50 | 50 |
| Hot Water Delivery (L) | 25 | 25 | 50 | 50 |
| Net Weight Empty (kg) | 17 | 17 | 23 | 23 |
| Element Sizes (kW) | 2.4 | 2.4, 3.6 | 2.4 | 2.4, 3.6 |
| Relief Valve Pressure (kPa) | 1000 | 1000 | 1000 | 1000 |
| Max Inlet Pressure (kPa) | 800 | 800 | 800 | 800 |

[^] Proflo Plug-in model (plugs into standard power point)

TANK DIMENSIONS (MM)

| | 25L | 50L |
|---------------------------|-----|-----|
| A Overall Height | 455 | 670 |
| B Overall Diameter | 405 | 405 |
| C Hot Water Outlet | 275 | 490 |
| D Cold Water Inlet | 145 | 145 |
| E Electrical Entry | 70 | 70 |

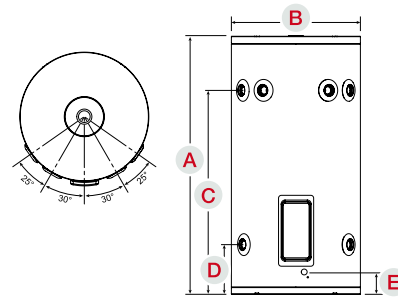

proflo large electric


| SPECIFICATIONS | 80T1 | 125X1 NARROW DIAMETER | 125T1 | 160T1 | 250T1 | 315T1 | 315T2 TWIN ELEMENT | 400T1 | 400T2 TWIN ELEMENT |
|---------------------------------|---------------|-----------------------|----------|----------|-------|-------|--------------------|-------|--------------------|
| Storage Capacity (L) | 88 | 132 | 130 | 161 | 259 | 321 | 321 | 415 | 415 |
| Hot Water Delivery Rating (L) | 80 | 125 | 125 | 160 | 250 | 315 | 315 | 400 | 400 |
| Twin Element Boost Capacity (L) | - | - | - | - | - | - | 50 | - | 80 |
| Element Sizes (kW) | 1.8, 2.4, 3.6 | 1.8, 3.6 | 1.8, 3.6 | 2.4, 3.6 | 3.6 | 3.6 | 2 x 3.6 or 2 x 4.8 | 3.6 | 2 x 3.6 |
| Net Weight Empty (kg) | 41 | 54 | 51 | 59 | 72 | 93 | 93 | 115 | 115 |
| Relief Valve Pressure (kPa) | 1400 | 1400 | 1400 | 1400 | 1000 | 1000 | 1000 | 1000 | 1000 |
| Max Inlet Pressure (kPa) | 1120 | 1120 | 1120 | 1120 | 800 | 800 | 800 | 800 | 800 |

All Dux Proflo water heaters are dual-handed for ease of installation and operate at 240V AC single phase electricity


TANK DIMENSIONS

| | 80L | 125L NARROW DIAMETER | 125L | 160L | 250L | 315L | 400L |
|--------------------------------|-----|----------------------|------|------|------|------|------|
| A Overall Height (mm) | 925 | 1300 | 1090 | 1315 | 1445 | 1765 | 1705 |
| B Overall Diameter (mm) | 490 | 490 | 530 | 530 | 620 | 620 | 705 |
| C Cold Water Inlet (mm) | 160 | 160 | 190 | 190 | 195 | 195 | 220 |
| D Hot Water Outlet (mm) | 735 | 1115 | 865 | 1095 | 1210 | 1530 | 1445 |

125L NARROW DIAMETER SPECIFICATIONS

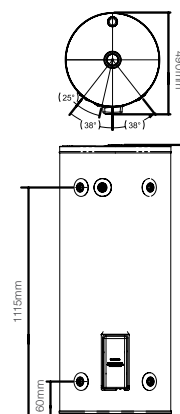


80L - 400L STANDARD MODELS

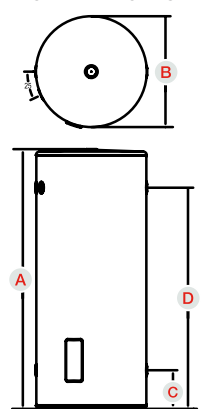

PRODIGY® GAS STORAGE

| SPECIFICATIONS | prodigy ⁴ | | prodigy ⁵ | |
|----------------------------------|----------------------|-----------------|----------------------|-----------------|
| | 135ZB4N/135ZB4P | 170ZB4N/170ZB4P | 135DC5N/135DC5P | 170DC5N/170DC5P |
| Nominal Capacity (L) | 135 | 170 | 135 | 170 |
| Net Weight Empty (kg) | 72 | 86 | 73 | 87 |
| Relief Valve Pressure (kPa) | 1400 | 1400 | 1400 | 1400 |
| Gas Consumption (Propane) (MJ/h) | 26 | 32 | 26 | 32 |
| Gas Consumption (NG) (MJ/h) | 28 | 33 | 28 | 33 |
| Energy Star Rating | 4.5 | 4.2 | 5.4 | 5.2 |

| TANK DIMENSIONS (MM) | 135L | 170L |
|---------------------------------|------|------|
| A Overall Height Outdoor | 1600 | 1900 |
| B Hot Water Outlet | 1325 | 1620 |
| C Cold Water Inlet | 220 | 220 |
| D Gas Inlet | 300 | 300 |

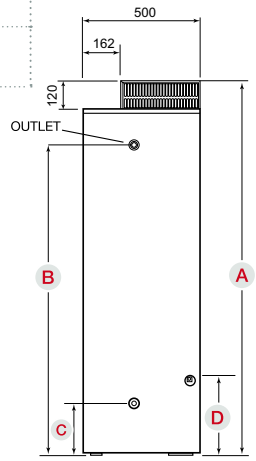


AIROHEAT® HEAT PUMP SYSTEM

| SPECIFICATIONS | airoheat |
|---|------------|
| | D2FHG4HW0C |
| Storage Capacity (L) | 250 |
| Net Weight Empty (kg) | 107 |
| Power Consumption (General Tariff - kW) | 1.2 |
| Max Water Supply Pressure (kPa) | 800 |
| Relief Valve Pressure (kPa) | 1000 |
| Rated Voltage | 240V ac |

Not suitable for installation in alpine areas or areas above 1000m.




| TANK DIMENSIONS (MM) | |
|------------------------|------|
| A System Height | 1710 |
| B System Width | 660 |
| C Inlet | 195 |
| D Outlet | 1210 |

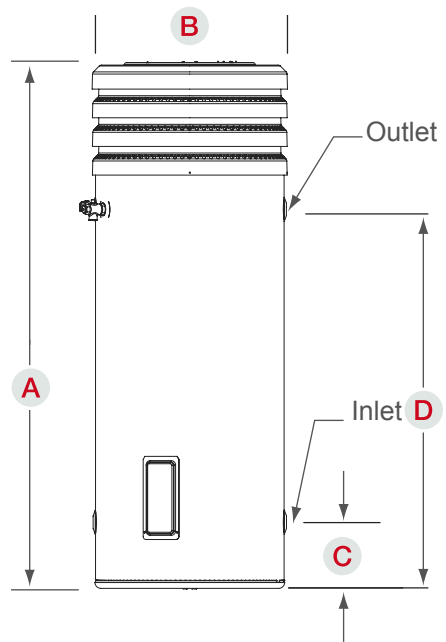

ALWAYS HOT GAS CONTINUOUS FLOW

| MODELS | CONDENSING MODELS | | | NON-CONDENSING MODELS | | |
|-----------------------------------|-------------------|-------------------|-------------------|-----------------------|-------------------|-------------------|
| Model Number - up to 50°C | 21ECB5N / 21ECB5L | 26ECB5N / 26ECB5L | 17ENB5N / 17ENB5L | 21ENB5N / 21ENB5L | 26ENA5N / 26ENA5L | 32END5N / 32END5L |
| Model Number - up to 60°C | 21ECB6N / 21ECB6L | 26ECB6N / 26ECB6L | 17ENB6N / 17ENB6L | 21ENB6N / 21ENB6L | - | - |
| Model Number - up to 75°C | - | - | - | - | 26ENA6N / 26ENA6L | 32END6N / 32END6L |
| Flow Rate (l/min @ 25° rise) | 21 | 26 | 17 | 21 | 26 | 32 |
| Min Operating Flow Rate (l/min) | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | 2.0 |
| Gas Consumption MJ/h - NG | 145 | 175 | 125 | 159 | 200 | 250 |
| Gas Consumption MJ/h - LPG | 149 | 185 | 130 | 158 | 200 | 250 |
| Star Rating | 6.7 | 6.7 | 6.0 | 6.1 | 6.0 | 5.8 |
| Gas Type | NG or LPG | NG or LPG | NG or LPG | NG or LPG | NG or LPG | NG or LPG |
| Weight (kg) | 17 | 18 | 14 | 15 | 22 | 30 |
| Max water supply pressure (kPa) | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| Min water supply pressure (kPa) | 200 | 200 | 200 | 200 | 200 | 200 |
| Cold Water Connection | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" |
| Hot Water Connection (mm) | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" |
| Gas Connection (mm) | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" | 20mm ¾" |
| Flue Diverter Horizontal Part No. | CF-S37 | CF-S37 | CF-L39 | CF-L38 | CF-L18 | CF-L7 |
| Flue Diverter Upward Part No. | - | - | - | - | - | CFC28 |
| Recess Box | RBM3 | RBM3 | RBM3 | RBM3 | RBM3 | RBM5 |
| Pipe Cover | CF-H33-K600 | CF-H33-K600 | CF-H33-K600 | CF-H33-K600 | CF-H33-K600 | CF-H32-K450 |



| DIMENSIONS (MM) | CONDENSING MODELS | | NON-CONDENSING MODELS | | | |
|--|-------------------|---------|-----------------------|---------|---------|---------|
| | 21L/min | 26L/min | 17L/min | 21L/min | 26L/min | 32L/min |
| Model | | | | | | |
| A Width | 350 | 350 | 350 | 350 | 350 | 450 |
| B Depth | 170 | 170 | 170 | 170 | 170 | 240 |
| C Height - Unit | 520 | 520 | 520 | 520 | 600 | 615 |
| D Height - Including Brackets | 575 | 575 | 575 | 575 | 655 | 665 |
| E Hot Water Outlet (From Back) | 45 | 45 | 40 | 40 | 40 | 70 |
| F Cold Water Inlet (From Back) | 87 | 87 | 80 | 80 | 97 | 140 |
| G Gas Connection (From Back) | 40 | 40 | 40 | 40 | 40 | 87 |
| Gas Connection Length (From Base) | 50 | 50 | 50 | 50 | 49 | 49 |
| H Cold Connection Length (From Base) | 48 | 48 | 48 | 48 | 48 | 48 |
| Hot Connection Length (From Base) | 45 | 45 | 45 | 45 | 44 | 44 |
| I Drain Outlet (From Back) | 21 | 21 | N/A | N/A | N/A | N/A |
| J Hot Water Outlet (From Centre) | 138 | 138 | 131 | 131 | 131 | 60 |
| K Drain & Cold Water Outlet (From Centre) | 63 | 63 | 24 | 24 | 54 | 119 |
| L Gas Connection (From Centre) | 128 | 128 | 128 | 128 | 100 | 100 |

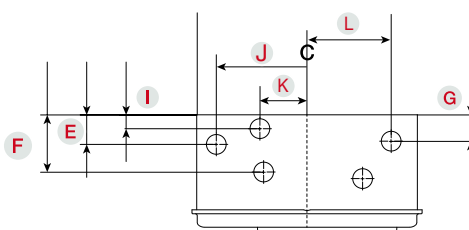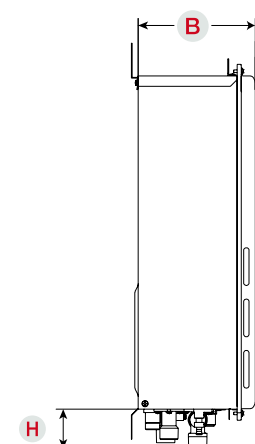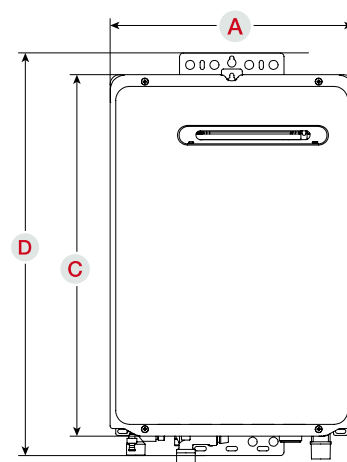

ECOSMART[®] BOOSTED SOLAR

| TANK SPECIFICATIONS | 250L | 315L | 400L |
|--|----------|----------|----------|
| ELECTRIC BOOSTED MODEL | 250DPM36 | 315DPM36 | 400DPM36 |
| GAS BOOSTED MODEL | 250DP0 | 315DP0 | 400DP0 |
| Storage Capacity (L) | 258 | 323 | 420 |
| Element Boost Capacity (L) - Electric only | 120 | 146 | 230 |
| Net Tank Weight Empty (kg) | 72 | 92 | 116 |
| Relief Valve Pressure (kPa) | 1000 | 1000 | 1000 |
| Max Inlet Pressure (kPa) | 800 | 800 | 800 |


| TANK DIMENSIONS (MM) | 250L | 315L | 400L |
|---|------|------|------|
| A Tank Height | 1440 | 1760 | 1700 |
| B Tank Diameter | 730 | 730 | 820 |
| C Outlet Height | 1210 | 1530 | 1445 |
| D Solar Return Height | 640 | 845 | 645 |
| E Pump Outlet Height | 520 | 520 | 545 |
| F Inlet Height | 195 | 195 | 220 |
| G Electrical Entry Height (Electric only) | 680 | 880 | 695 |

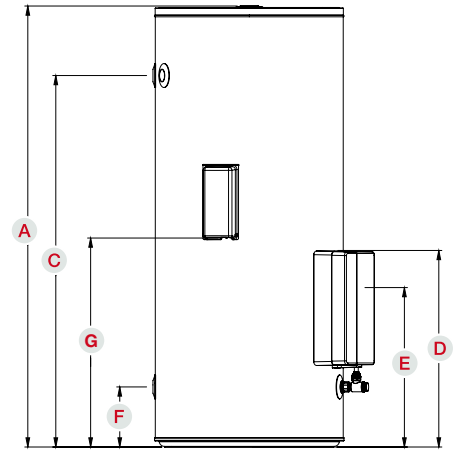

GAS BOOSTER SPECIFICATIONS

| BOOST SPECIFICATIONS | |
|-----------------------------|-------------------------|
| Gas Continuous Flow | 26L/min |
| Gas Consumption (MJ/Hr) | 200 |
| Gas Type | Natural / LPG |
| Cold Water Socket Size (mm) | RP $\frac{3}{4}$ " / 20 |
| Gas Pipe Inlet Size (mm) | RP $\frac{3}{4}$ " / 20 |
| Relief Valve Pressure (Kpa) | 1000 |
| Weight (kg) | 22 |

| DIMENSIONS (MM) | |
|--------------------------------------|-----|
| A Width | 350 |
| B Depth | 170 |
| C Height - Unit | 600 |
| D Height - Including Brackets | 655 |
| Gas Connection Length (From Base) | 49 |
| E Cold Connection Length (From Base) | 48 |
| Hot Connection Length (From Base) | 44 |

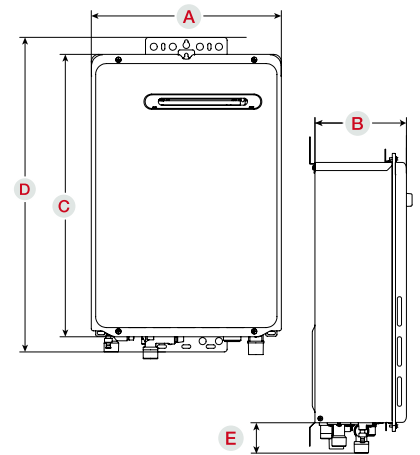

SOLAR COLLECTORS

| PANEL SPECIFICATIONS | FSA20 |
|------------------------------|---|
| Total Area (m ²) | 2 |
| Weight Without Water (kg) | 35 |
| Glass Thickness (mm) | 3.2 |
| Glass Material | Low iron tempered textured glass |
| Absorber Material | Black chrome, selective surface (aluminium plate) |
| Copper Rises | 8 |

| PANEL DIMENSIONS (MM) | |
|-----------------------|------|
| Panel Height | 2000 |
| Panel Width | 1000 |
| Panel Depth | 95 |



.....

100
YEARS
MANUFACTURING
IN AUSTRALIA

1300 365 116

dux.com.au

*WARRANTY

Full warranty terms and conditions are in the product's Owners Manual,
visit www.dux.com.au/warranty-terms for full details and conditions which apply.

Sales: 1300 365 116 Service: 1300 365 115 or visit dux.com.au for more.

© 2021 Dux Manufacturing Limited ABN 19 077 879 844. Lackey Rd, PO Box 209 Moss Vale, NSW 2577.

The information supplied was correct at time of printing. Specification and materials may change without notice.

® and ™ Trademarks of Dux Manufacturing Limited.

DEC2021